




Toll Free: 1-800-782-5752
 Fax: 763-295-6601
 E-mail: info@gosuburban.com
 www.gosuburban.com

Suburban Sidewinder Sleeve® 20 UBG

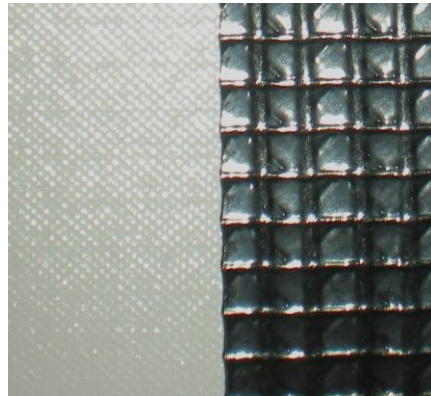

Inside on Left—Outside on Right

20 UBG Material Features

- Material: 20 Mil Urethane Laminate over Nylon 6 Scrim
- Temperature Range: -60° to +250° F
- Abrasion: Excellent; Ranked Highest, meets ISO 6945 Specifications
- Puncture/Tear: Excellent; Extremely difficult to puncture or tear
- UV protection: Excellent; Best Barrier, meets EN13758-1, top rating of 80 New
- Chemicals: Excellent, unaffected by water, petro chemicals, or mild caustics
- Wicking: Excellent; non wicking
- Welding Sparks/Spall: NOT Recommended

Typical Applications:

This material is used on the toughest applications where abrasion can not be avoided. Thickness of product restricts bend radius. Extremely low co-efficiency of friction. This material slides verses wearing.