


Moisture Minder® I Automatic Drain Valve P/N 152-0000

ZERO LOSS ENERGY EFFICIENT DRAIN RATED FOR UP TO 30 HP




- Requires No Electricity
- Rated For Up To 600 PSI
- Lowest Pressure Drop Of Any Automatic Drain
- Stainless Steel and Anodized Aluminum Construction
- Automatically Cycles Off Unloader Line
- Easy Installation
- **Can Be Used On Compressors/Dryers Up To 300 HP With Optional Drain Minder Controller (P/N 144-0001)**

VALVE AT REST

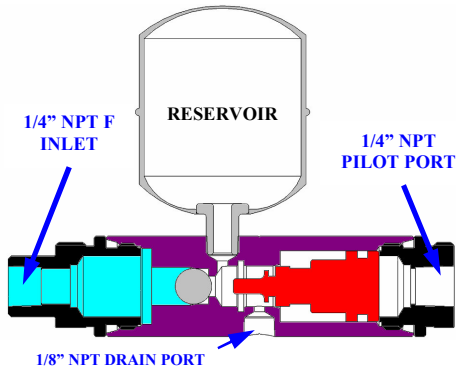


Condensation enters left hand or water inlet of valve.

PILOT SIGNAL FROM UNLOADER

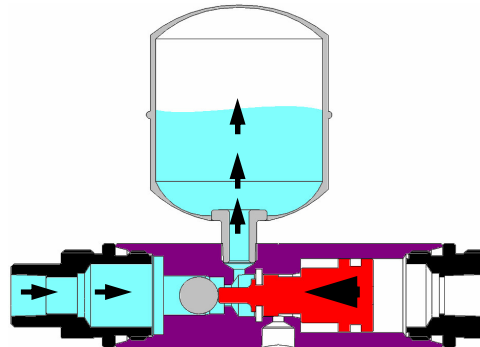

Pilot signal causes piston to shift, closing off the drain port. As piston continues to move it will open up the stainless ball check allowing condensate to be forced up into the external reservoir creating a discharge pressure.


PILOT SIGNAL RELIEVED

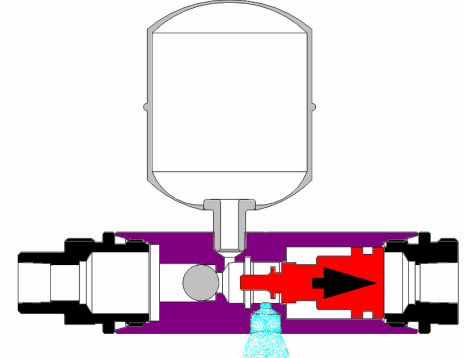

When pilot signal is relieved piston returns to home position, ball check closes preventing zero pressure loss in system, drain port opens and stored condensate is ejected from the drain port.

UNLIMITED MOUNTING OPTIONS

Moisture Minders® are **UNIQUE**, they do not have to be located beneath the tank or filter.

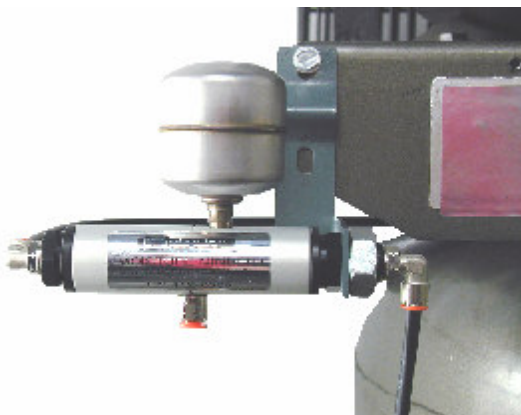

MOTOR PLATE MOUNT

Length	5 1/2"
Diameter	1 1/4"
Height	4 1/4"
Weight	1.0 Lbs.

OPTIONAL INSTALLATION KIT



FILTER MOUNT



TANK MOUNT