


Moisture Minder® II Automatic Drain Valve P/N 142-0000


ZERO LOSS ENERGY EFFICIENT DRAIN RATED FOR UP TO 5 HP




- Requires No Electricity
- Rated For Up To 600 PSI
- Lowest Pressure Drop Of Any Automatic Drain
- Stainless Steel and Anodized Aluminum Construction
- Automatically Cycles Off Unloader Line
- Easy Installation
- Typical Applications: HVAC, Dental, Medical, Handicap Accessible Doors, Beverage Compressors, and Fire Sprinkler Systems.

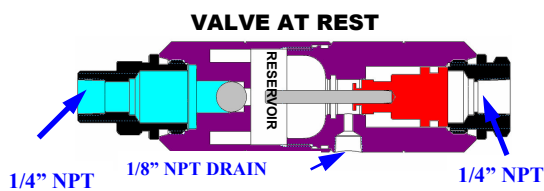

Condensate enters left hand or water inlet of valve.

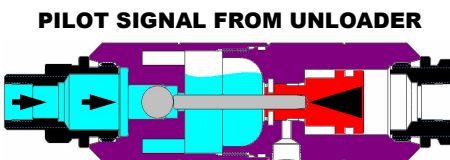

Pilot signal causes piston to shift, closing off the drain port. As piston continues to move it will open up the stainless ball check allowing condensate to be forced into the internal reservoir creating a discharge pressure.

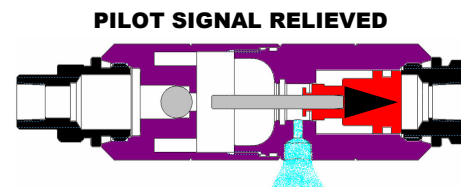

When pilot signal is relieved piston returns to home position, ball check closes preventing zero pressure loss in system, drain port opens and stored condensate is ejected from the drain port.


UNLIMITED MOUNTING OPTIONS

Moisture Minders® are **UNIQUE**, they do not have to be located beneath the tank or filter.




MOTOR PLATE MOUNT

OPTIONAL INSTALLATION KIT

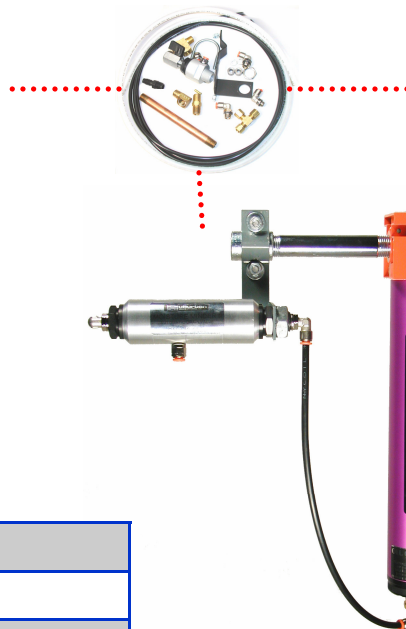

FILTER MOUNT

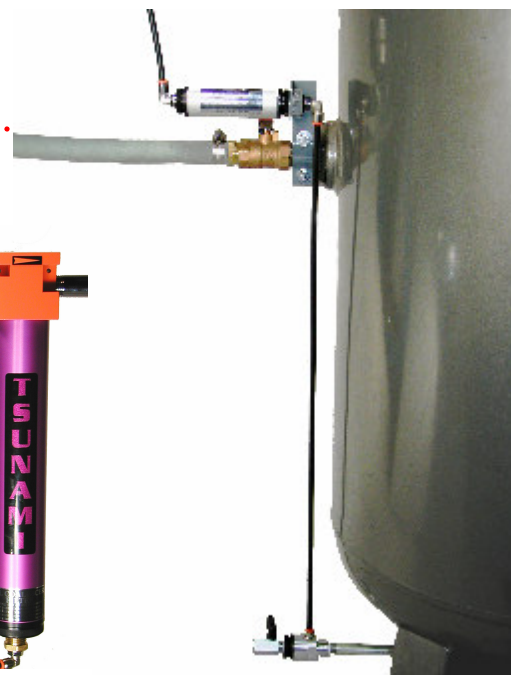

TANK MOUNT

Length	6 1/2"
Diameter	1 5/8"
Weight	1.0 Lbs.